

## J Pipe

SKU: C-JPIPE-6

### Recommended Tools:

- 5/16" Hex Key
- Two Cross Pipes

### Step 1:

Place a **1.25" Crossover Fitting** on each of the two Cross Pipes, ensuring the pipes are positioned one above the other (not side by side). This creates two secure mounting points for the **J Pipe**. Align the **Crossover Fittings** so the J Pipe's vertical pipe can pass through them, then slide the vertical pipe up through both fittings.

### Step 2:


Install a **Locking Collar** between the top **Crossover Fitting** and the **Safety Pin**. Tighten the **Crossover Fitting** set screws on the cross pipes until secure.

### Step 3:


Adjust the **J Pipe** to your preferred height and orientation. Secure it by tightening the **Crossover Fitting** set screws into the vertical pipe, then tighten the **Locking Collar's** set screw.

### Step 4:

Slide a **Locking Collar** onto the **J Pipe's** horizontal section. Position the obstacle between this and a second **Locking Collar**, making sure both collars are against the obstacle's bearing. Tighten set screws until secure.

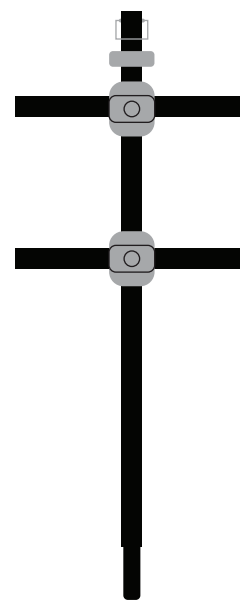

Front View

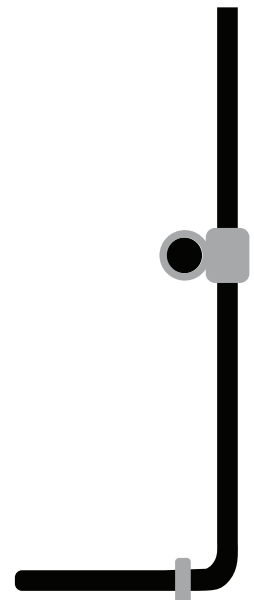

Side View

Part Number	Part Description	Quantity
C-JPIPE-6	J Pipe	1
KEE-45-7	1.25" Crossover Fitting	2
KEE-75-7	Locking Collar	3
SPC-S07095300	Safety Pin	1

### Need help?

Call 1-800-932-3339 or  
Email [info@gymsupply.com](mailto:info@gymsupply.com)