


Padded Swing

SKU: NW-PS

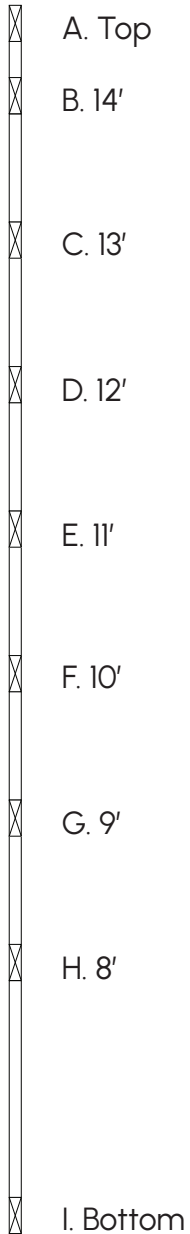

Part Number	Part Description	Quantity
CUSTOM	Padded Swing	1
L-QLINK.38	3/8" Quick Link	4
208	17" Adjustable Nylon Straps	4

Need help?
Call 1-800-932-3339 or
Email info@gymssupply.com

Step 1:

Locate the Bottom of the strap (I) and insert it through the hole on the padded swing.

Step 2:

Thread the Top end of the strap (A) through the initial loop, passing it entirely through, and then secure it tightly to form a knot at the base of the swing.

Step 3:

Hang the strap's end over your cross pipe and use a quick link to join the lowest adjacent loops together so that the swing is xft from the ground. Using the lowest loops will prevent excess strap hanging.

For 10 ft rigs, we recommend using the 5th and 6th loops at the top.

Step 4:

Repeat Steps 1-3 for each additional strap.

IMPORTANT:

For each additional strap, be sure to use the same loops on each side to keep the swing level.