

Skyhook

SKU: NW-SKYHOOK

Recommended Tools:

- 5/16" Hex Key
- Two Cross Pipes

Step 1:


Place a 1.25" Crossover Fitting on each of the two Cross Pipes, ensuring the pipes are positioned one above the other (not side by side). This creates two secure mounting points for the Skyhook. Align the Crossover Fittings so the skyhook's vertical pipe can pass through them, then slide the vertical pipe up through both fittings.

Step 2:

Install a Locking Collar between the top Crossover Fitting and the Safety Pin. Tighten the Crossover Fitting set screws on the cross pipes until secure.

Step 3:

Adjust the Skyhook to your preferred height and orientation. Secure it by tightening the Crossover Fitting set screws into the vertical pipe, then tighten the Locking Collar's set screw.

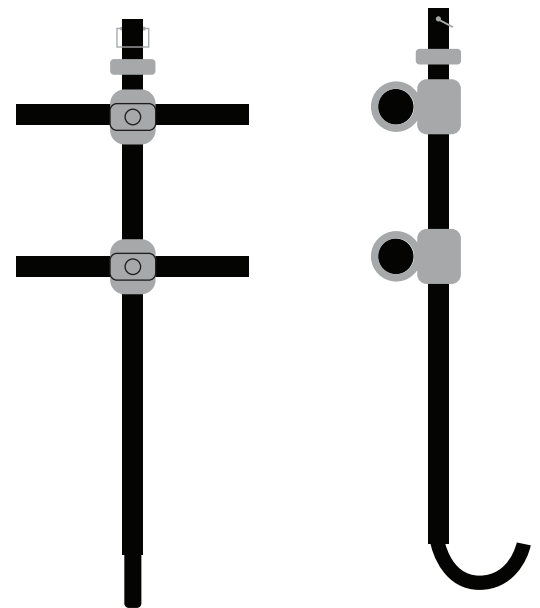

Front View

Side View

Part Number	Part Description	Quantity
NW-SKYHOOK	Skyhook	1
KEE-45-7	1.25" Crossover Fitting	2
KEE-75-7	Locking Collar	1
SPC-S07095300	Safety Pin	1

Need help?

Call 1-800-932-3339 or
Email info@gymsupply.com